



PROJECT

CATALOG #

TYPE


NOTES

C-LL STANDARD PLUS

The compact C-LL ledge light is a perfect addition to lighting projects for clients with modest budgets. Because of its corrosion-resistant construction, the fixture is especially at home in coastal regions.

Quick Facts

- Midgrade brass construction
- Corrosion-resistant design
- Attractive antique bronze finish
- Integrated LED
- Input voltage: 10-15V

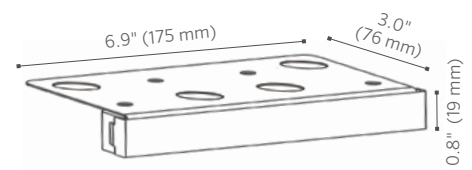

C-LL Ledge Light SPECIFICATIONS

Output	Integrated LED
Total Lumens	151
Input Voltage	10 to 15V
Input Power (W)	4.0
VA	4.2
Efficacy (Lumens/Watt)	37
Color Rendering Index (CRI)	80+
Center Beam Candlepower	--
Dimming	PWM, Phase
RGBW Available	No
Luxor Compatibility	
Default	--
ZD Option	--
ZDC Option	--
Minimum Rated Life (L70)	33,000 Hrs

FX Luminaire

FX Luminaire is an industry-leading manufacturer of landscape and architectural lighting products with a focus on the advancement of LED technology and digital lighting control with zoning, dimming, and color adjustment capabilities. We offer a full spectrum of specification-driven lighting fixtures that can be utilized to create elegant, cutting-edge landscape lighting systems for commercial or residential applications. Our products are available exclusively via our extensive professional distributor network.

Materials

Die-cast midgrade brass housing with stainless steel mounting brackets

Wiring

18 AWG (1 mm); SVT; 220°F (105°C); 300V; 10' (3 m) length

Weight

2 lbs. (0.9 kg)

Ambient Operating Temperature

-30°F to 140°F (-34°F to 60°F)

Lamp

Integrated LED module

Power

Input 10-15 VAC/VDC, 50/60 Hz. Remote transformer required (specify separately).

Housing

Midgrade brass

Warranty

5-year limited warranty on luminaire

Manufacturing

9001:2015 certified facility

Lens

Tempered glass lens with shock resistance and high tolerance for thermal expansion and stress

Finish

Antiqued finish with brushed effect

Control

Remote transformer


Sustainability

Innovation meets conservation in the design and manufacturing of our products. Where we can, we use recycled materials while maintaining superior functionality. Our LED products provide high-quality light at optimal energy efficiency, lifespan, and durability.

Listings



C-LL Ledge Light ORDERING INFORMATION


Fixture	Output	Finish
C-LL	■ LED20W 20W Equivalent, 2,700K	■ AB Antique Bronze 

EXAMPLE FIXTURE CONFIGURATION:

C-LL-LED20W-AB



LUXOR® TECHNOLOGY OPTIONS: Specify Separately

Cubes	Code
■ LOW-VOLTAGE CUBE <i>Supports AC dimmable LEDs and incandescent;</i> MAX LOAD: 60W/5A	LCM-LV 

C-LL Ledge Light PHOTOMETRICS

C-LL20LED Illuminance at a Distance

Feet (Meters)	Center Beam	Beam Width	
	Foot-Candle (Lux)	Vertical 112.5°	Horizontal 111.2°
4' (1.2 m)	3.3 fc (36 lx)	12.0' (3.7 m)	11.7' (3.6 m)
8' (2.4 m)	0.8 fc (9 lx)	24.0' (7.3 m)	23.4' (7.1 m)
12' (3.7 m)	0.4 fc (4 lx)	35.9' (10.9 m)	35.1' (10.7 m)
16' (4.9 m)	0.2 fc (2 lx)	47.9' (14.6 m)	46.7' (14.2 m)
20' (6.1 m)	0.1 fc (1 lx)	59.9' (18.3 m)	58.4' (17.8 m)
24' (7.3 m)	0.1 fc (1 lx)	71.9' (21.9 m)	70.1' (21.4 m)

© 2019 Hunter Industries Inc. Hunter, FX Luminaire, all related logos, and all other trademarks are property of Hunter Industries, registered in the U.S. and other countries.